



MACO PROTECT DOOR LOCKS



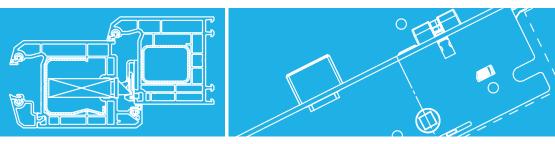

C-TS COMBINED DOOR LOCK PVC, TIMBER & COMPOSITE



C-TS combined door lock, the fabricator's choice



Combined lift lever and split spindle door lock.

The MACO PROTECT C-TS combined door lock enables the fabrication of a wide range of easy to operate door styles from a single multipoint door lock.

- Highly secure multipoint locking system
- Single function lock for use as a lift lever or split spindle operated door lock
- Smaller compact central lockcase
- The dead bolt is operated from the lever handle reducing the force required to lock the door
- MACO easy latch reduces noise and the force required to latch the door
- MACO easy latch release ensures a simple reversal process without the need for tools
- The spindle pack controls the function of the lock:
 - Solid Spindle bar = Lever lever function
 - Split Spindle Pack = Split spindle function
- · Non handed lock design
- Reduced operating forces through:
 - Increased handle movement
 - MACO 'D' drive technology
- Suitable for both sprung and unsprung handle sets

- Can be used with two and three screw fixing handles
- · Forged steel dead locking hook bolts
- Passive hook design for security and not weather performance
- Compression and weather performance via MACO standard locking cams
- Small compact hook case design



Setting new standards in door lock technology



Setting new standards in door lock technology.

The MACO PROTECT C-TS combined door lock is setting new performance standards for doors fitted with multipoint door locks.

- Combined easy to adjust hook and cam profile related striker plates
- High levels of adjustability through adjustable striker plates and locking cams
- Reduced hook cut out within the striker plates increases the security performance
- Security can be further increased with top and bottom shootbolts
- Reduced machine time through smaller lockcase designs
- High stability through a 3mm thick faceplate, available in widths of 16mm and 20mm
- Faceplate lengths available 2200mm for single doors and 1800mm for double doors
- PAS24-2012 security tested
- Endurance tested to 50,000 operations

- Available to suit doors manufactured from PVC, Timber and Composite materials
- MACO silver look surface treatment tested to 480 hours Class 5 EN 1670 corrosion resistance
- Available in MACO TriCOAT Plus surface technology tested in excess of 2000 hours Class 5 EN 1670 corrosion resistance
- 10 year product warranty
- Approved under the MACO Secure Plus guarantee scheme. Ask MACO for details



C-TS Combined Door Lock 2 x Steel Hook Locking

C-TS Combined	Locking Style	BS (mm)	HC (mm)	(mm)	Faceplate	Length (mm)	Box Qty
242351	2 Hook	35	92	8	16	2200	5
242353	2 Hook	45	92	8	16	2200	5
242361	2 Hook	35	92	8	20	2200	5
242363	2 Hook	45	92	8	20	2200	5





C-TS Combined Door Lock 2 x Steel Hook-Cam Locking

C-TS Combined	Locking Style	BS (mm)	HC (mm)	(mm)	Faceplate	Length (mm)	Box Qty
242371	2 Hook-Cam	35	92	8	16	2200	5
242373	2 Hook-Cam	45	92	8	16	2200	5
242381	2 Hook-Cam	35	92	8	20	2200	5
242383	2 Hook-Cam	45	92	8	20	2200	5





C-TS Combined Door Lock 2 x Steel Hook-Cam + 2 Cam Locking

C-TS Combined	Locking Style	BS (mm)	HC (mm)	(mm)	Faceplate	Length (mm)	Box Qty
242391	2 Hook-Cam + 2 Cam	35	92	8	16	2200	5
242393	2 Hook-Cam + 2 Cam	45	92	8	16	2200	5
242401	2 Hook-Cam + 2 Cam	35	92	8	20	2200	5
242403	2 Hook-Cam + 2 Cam	45	92	8	20	2200	5





C-TS Combined Door Lock 2 x Steel Hook-Cam Locking

C-TS Combined	Locking Style	BS (mm)	HC (mm)	(mm)	Faceplate	Length (mm)	Box Qty
242411	2 Hook-Cam	35	92	8	16	1800	5
242413	2 Hook-Cam	45	92	8	16	1800	5
242421	2 Hook-Cam	35	92	8	20	1800	5
242423	2 Hook-Cam	45	92	8	20	1800	5







