

# SR700


## Single Room Heat Recovery Unit

### For use in residential dwellings

The SR700 from Titon is a decentralised ventilation unit with heat recovery providing continuous airflow to your home. It extracts stale, moist and contaminated air and replaces it with warmed fresh air from outside, improving indoor air quality and keeping heating costs down.

The system is easily installed and maintained, ideal for removing internal condensation and eliminating mould growth within the home. Unlike regular extractor fans that waste 100% of heat that passes through them, the SR700 system will recover up to 84%\* of wasted heat and create a comfortable living environment. It is recommended that the system is designed in pairs to allow for the system to work to its full capability.

SR700

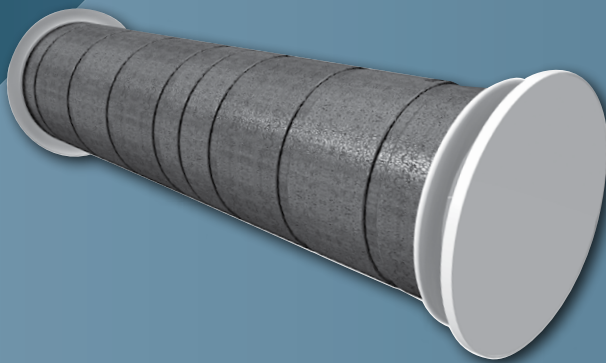


SRC Controller




### Features & Benefits

- Easy to maintain
- Low noise and vibration levels due to expanded polypropylene housing
- Low profile wall mounted fascia
- No additional ductwork required
- 'Sleep mode' function. By putting the unit to sleep, fans can be configured to either stop (default) or slow to humidity protection level for a period of time (default 1 hour) after which they will return to the previous setting
- 'Intensive speed' (Manual) to quickly remove any odours that are present.
- 'Intensive speed' (Automatic) to quickly remove excessive amounts of poor air, moisture and dangerous levels of Carbon Dioxide from within the home. (Sensors required).
- 'Cross ventilation' for a constant flow of fresh air through the house (No heat recovery)
- Wall thickness: Min. 305mm - Max. 700mm+
- Achieves 20Pa back pressure as per BS EN 13141-8:2014
- SR700 controller can connect up to 6 fans

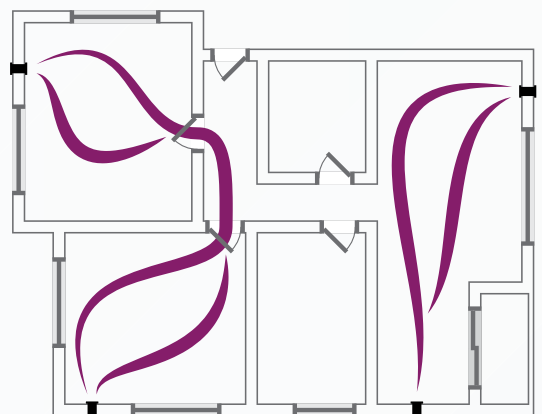

## Drawing & Dimensions

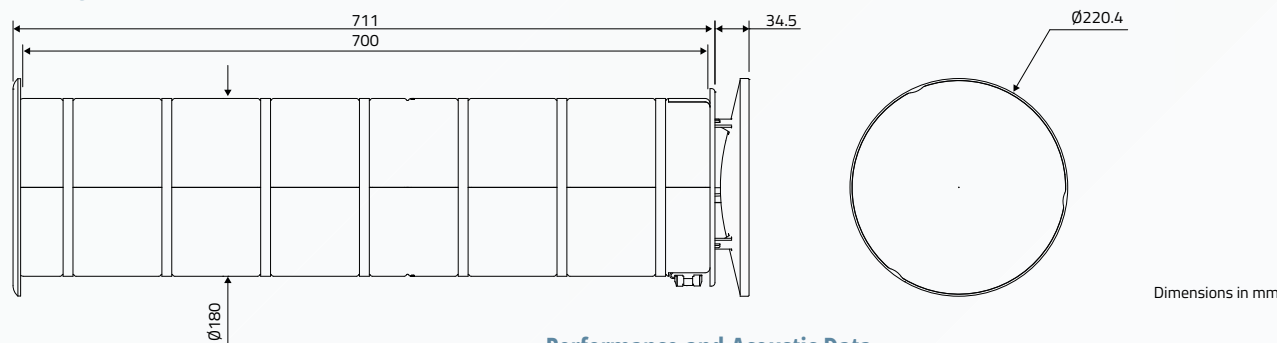

Dimensions in mm

## Product Codes

**TP600** - SR700

**TP590** - SRC1 (Control unit)

**XP2010311** - Replacement PM Coarse 55% (G3) filter

**XP2010320** - Replacement insect filter

**TP614** - Relative humidity (RH) sensor (flush mount)

**TP616** - Combined relative humidity (RH) and Carbon dioxide (CO<sub>2</sub>) sensor (flush mount)

**TP617** - Volatile organic compound (VOC)/Air quality sensor (flush mount) quality sensor (flush mount)

## Standards

BS EN 13141-8:2014 (Ventilation for buildings)

EN 55014-1:2006 inc A1:2009 & A2:2011

EN 55014-2:2015 category IV

EN 61000-3-2:2014

EN 61000-3-3:2013 (Electromagnetic compatibility [EMC]) BS

EN ISO 717-1:2013

BS EN ISO 10140-2:2010

BS EN ISO 3741:2010 (Acoustics)

IEC 60335-2-80:2002 +A1:2004, +A2:2008 in conjunction with IEC 60335-1:2010

BS EN 60335-2-80:2003 +A1:2004, +A2:2009 in conjunction with EN 60335-1:2012/AC:2014 +A11:2014

BS EN 62233 (Electrical Safety)

CE and UKCA marked.

## Specification

**Dimensions:** 711 long x Ø180 inside wall & Ø220mm x 35mm internal fascia

**Weight:** SR700 - 3Kg, SRC1 controller - 94g

### Materials:

Tube: Expanded polypropylene (EPP)

Components: White ABS plastic

Heat exchanger: Ceramic

Filters: Synthetic

Internal insulation: Closed cell foamed nitrile

Fascia plate: White Perspex

**Guarantee period:** 2 years

**Electrical:** 230V ~ 50/60Hz, 3A fuse

**Installation:** The Titon SRHRV Fan unit is designed to be mounted through a wall with a thickness between 305mm & 700mm.

**Maintenance:** Easy to maintain. Routine service and filter clean/ replacement are all that are normally required to keep the SRHRV System working efficiently. Subject to local environment - see product manual.


## Performance and Acoustic Data

Product	Fan Speed Setting	Airflow (m³/h)	dB(A) Max @ 3m Hemispherical	SFP (W/l/s) @0 pa
SR700	Fan Setting 1 (Large Dwelling)			
	*Sleep Mode	6.5 or off	8/0	0.62
	*Off	-	-	-
	Humidity protection	6.5	8	0.62
	Reduced	20	19	0.27
	Nominal	40	32	0.22
	Intensive	60	39	0.24
	Fan Setting 2 (Small Dwelling)			
	*Sleep Mode	6.5 or off	8/0	0.62
	*Off	-	-	-
	Humidity protection	6.5	8	0.64
	Reduced	10	11	0.44
	Nominal	17	18	0.3
	Intensive	25	24	0.24

\*Configurable option

Airborne sound insulation. Rating according to: BS EN ISO 717-1:2013 & BS EN ISO 10140-2:2010	
Status	Dn,e,w (c;ctr)
Unit Open	34dB
Unit Closed	51dB

## Accessory - Metal External Grille

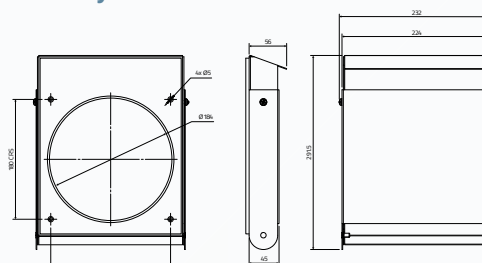

Part Number - **TP601**

Dimensions in mm

## SRC1 Controller

A system consists of a central control unit which manages between 1 and 3 off pairs of through the wall 12V --- (dc) bidirectional fan units which are typically fitted in pairs so that they can provide cross flow ventilation within the home.

A controlled ventilation system such as the SR700 from Titon meets the criteria for low energy housing and is ideal for installing during refurbishment of a home.

## Sensors



Flush mount



Part Number - **TP590**

Sensor Description	Flush Mount
Relative humidity (RH) Sensor	<b>TP614</b>
Combined relative humidity (RH) and Carbon Dioxide (CO <sub>2</sub> ) Sensor	<b>TP616</b>
Volatile organic compound (VOC)/Air Quality Sensor	<b>TP617</b>