

Securistyle Restrictor Stays

Window safety restrictor stay

Suitable for:

PVCu



ALUMINIUM



TIMBER



The Securistyle Restrictor Stay is a cavity fit friction stay suitable for domestic and commercial applications and is available in detachable and non-detachable versions.

The Securistyle Restrictor Stay is designed for top or side hung applications.


Features and Benefits

- Withstands a force of up to 600N in restricted position
- Enhanced corrosion resistance
- Easy to fit, no routing required
- Suitable for cavities between 13 and 18mm
- Non-handed

None - Detachable



Detachable

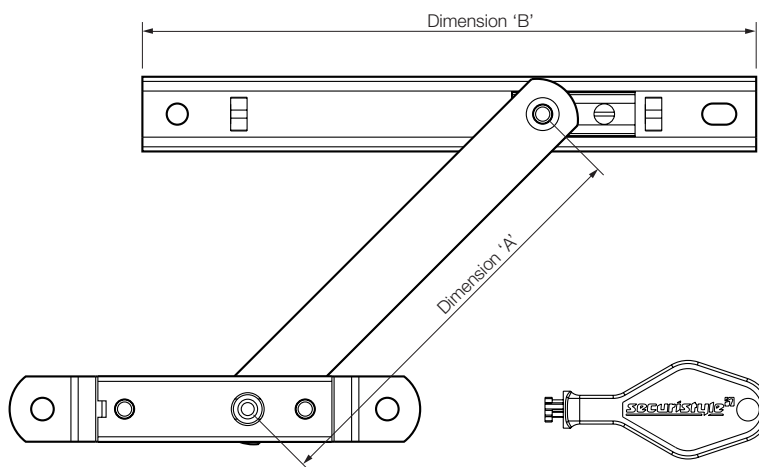

R7437 release key

Product	Product Code	Cavity (mm)	Dimension 'A' (mm)	Dimension 'B' (mm)
Detachable				
4" Detachable Restrictor	SDR4	16-18	102	150
6" Detachable Restrictor	SDR6	16-18	152.5	200
8" Detachable Restrictor	SDR8	16-18	203.5	200
10" Detachable Restrictor	SDR10	16-18	254	250
Release Key	R7437	16-18		
Non-Detachable				
4" Defender Restrictor (domestic)	RS4	13-14	95	150
6" Defender Restrictor (domestic)	RS6	13-14	148.5	150
9" Defender Restrictor (domestic)	RS9	13-14	229.5	150
4" Sterling Restrictor (non-domestic)	SR4	16-18	94	249
8" Sterling Restrictor (non-domestic)	SR8	16-18	204	249
16" Sterling Restrictor (non-domestic)	SR16BAC	16-18	400	401.5

Manufactured from

Austenitic 304 grade 1.4301

Recommended screws

Domestic – 4mm (No.8) mushroom head or specialist equivalent e.g. specialist thread for PVCu
Commercial – 5mm (No.10) self tapping, pan or mushroom head or M5 screws or M5 rivnuts e.g. specialist thread for PVCu

Standards

Tested in accordance with DD CEN/TS 13126-5:2004, BSEN1670 (Austenitic Grade 5), BS 6375 Part 2:2004 and BS EN ISO 10088 Part 2

Finishes

Austenitic stainless steel

More information

enquiries@titon.co.uk / 01206 713801



Restrictor mode



Key to detach



Unrestricted