

auralite® HRV

HRV Q Plus Basic Indicator

For use with Titon HRV Q Plus Range

auralite® HRV is a low voltage, hard wired status indicator sited remotely from the unit.

Product Number

auralite® HRV - **TP518*** (Compatible with TP***HMB Only)

auralite® HRV - **TP519** (Compatible with TP***B Only)

*Flying lead option only, where aura-t™ is not present.

Description

auralite® HRV is a remote status indicator for use with Titon HRV Q Plus unit.

Features & Benefits

- Meets guidelines for occupant accessibility
- Increase occupant awareness of system operation
- Can be sited remotely from unit in an easy to access location
- Discreet design
- Fits a standard UK pattress box
- Compatible with Titon HRV units

Standards

Meets guidelines for occupant accessibility as set out in NHBC Standards 2022 - Section 8.3.6:

MVHR systems should include visual indicators showing maintenance and serving requirements, and mode of operation. These should be visible from within the insulated envelope, not obscured from view, and be simple to use.

Specification

Dimensions: 90mm wide x 90mm high x 12mm deep

Weight: 50g

Finish: High gloss finish

Materials: Polycarbonate

Guarantee period: 1 year

Electrical: 12V DC

Installation: Suitable for mounting on a standard UK recessed pattress box. Supplied with screws.

Indicator



auralite® HRV has six LEDs which display;

Normal - the system is running at continuous speed (normal mode) or the unit is running at setback speed if this light is flashing

Frost - the unit is in automatic frost protection mode.
TP519 if flashing - internal frost protection - indoor temperature low - both fans stop.

Filter - the filters require changing

Boost - the system is running in boost speed:

TP518 - If flashing indicates boost alert (**HMB model only**)

TP519 - If flashing indicates SUMMERboost/speed 4 (**B model only**)


Summer - the unit is in summer bypass mode

Fault - there is a fault with the system and the installer should be contacted.

Normal/Boost - alternating indicates demand control from proportional sensors (only applicable with **TP519**)

auralite® HRV is to be used with Titon's HRV units. For compatibility please contact us on +44 (0)1206 814879 or ventsales@titon.co.uk.

Drawing and Dimensions

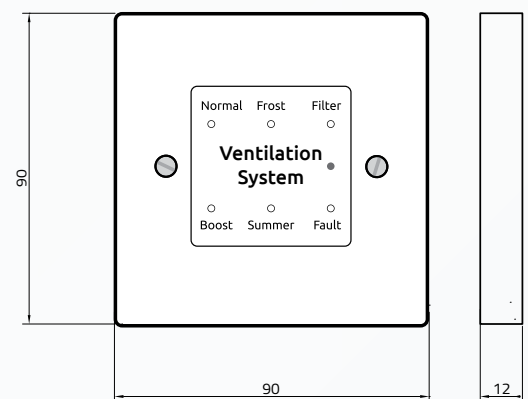

Dimensions in mm