

Wholehouse central extract ventilation unit

Features

- Suitable for continuous ventilation
- Control option includes simple 3 speed switching
- Low noise centrifugal fan
- Energy efficient external rotor motor with maintenance free bearings
- Up to 4 ducts can be connected
- 125mm diameter spigots
- Unit meets Building Regulations through BRE digest 398


Specification

Voltage: 230 V 50Hz

Power Consumption: 12/22/41 watts

Performance

Airflow

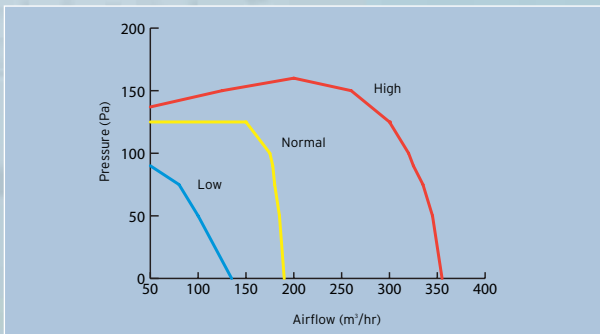

Specific Fan Performance (watts/litres/second)

Low	Normal	High
0.43	0.45	0.59

Acoustic Properties

dBA at 3m		
Low	Normal	High
13	29	35

Specifiers Text


Click on www.titon.com/spectext or available on request

Details

Code	Description
MVS-8	MVS-8 MEV unit 230 V AC standard



MVS-8

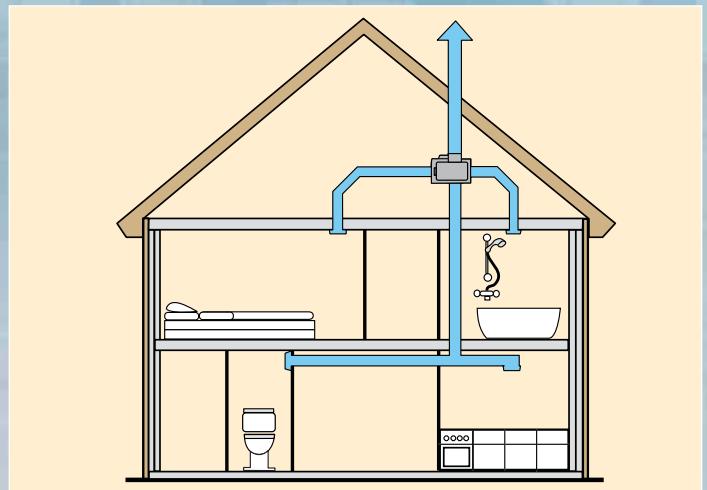

MVS-8 typical application

