

Trimvent® Select E18

Recessed clip-fix slot ventilator



Trimvent® Select E18 Ventilator

Suitable for:



Trimvent Select E18 is a semi-recessed plastic slot ventilator that fits over a 3/4" slot in the window to provide a much healthier indoor air environment in the home and give the home occupants greater comfort and control in doing so.

It features a unique directional deflector that allows the occupant to position the airflow for optimum comfort and performance.



Trimvent vents all give optimum airflow. Specifically developed to improve indoor air quality requirements throughout North America and the Rest of the World. Trimvent Select ventilators have been specified and fitted on millions of windows throughout the world for more than fifteen years.






Trimvent® Select GS18 Grilles

Features and Benefits

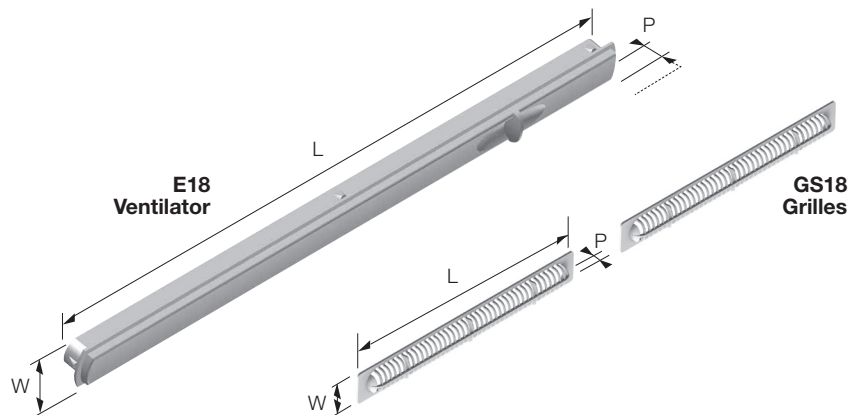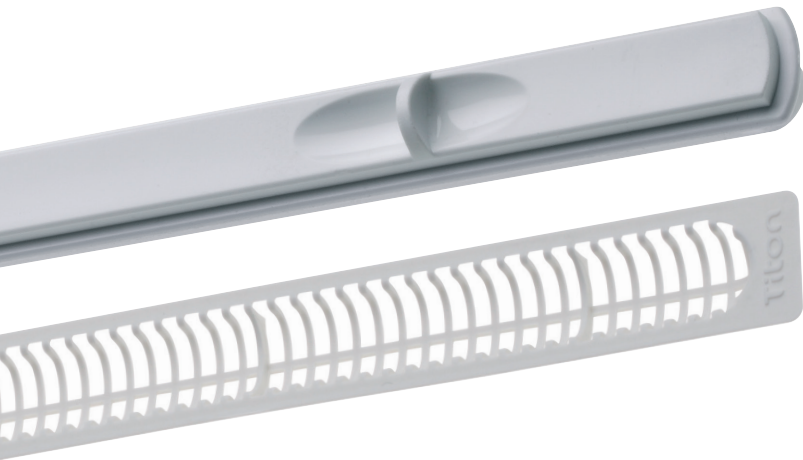- Unique occupant controllable tilting T-bar
- Deflects air up or down, or both
- Based on the original and successful Trimvent design
- Ideal for overhead add-on extension sections
- Push to fit, no tools or screws required
- Minimal projection (when closed) for ease of window stacking
- Flange covers slot edges
- Clips in to 3/4" slot
- 6 9/16 in² free area
- For use with GS13 grilles (or C13 canopy)
- Sculpted finger recess
- Patented and registered design
- Remote control vent available
- Suitable for aluminum, vinyl and fiberglass windows



Product	Product Code	(L) Length	(W) Width	(P) Projection Closed-Open	Available Air Opening (Free Area)	Slot Size
Trimvent E18 Range – 3/4" slot width						
E18 4200 Internal Trickle Ventilator	TS1134212	14 5/8"	1 5/16"	1/2" – 7/8"	6 9/16 in ²	14 7/16"  3/4"
GS18 210 pair of Grills	TS3184050	8 1/4" each	1"	1/16"	7 1/8 in ²	16 1/16"  3/4"
GS13 4000 pair of Grills	TS3134050	7 9/16" each	1 1/16"	9/16"	3 1/4 in ² each	6 13/16"  1/2"

Manufactured from

PBTP (UV Stable) & POM, GS18 – PP.

Performance

(Further test information available on request).

Free Area – see above.

Water Resistance – in excess of 12.5 psf / 600Pa.


Acoustic STC – open 31dB – closed 43dB.

Finishes

Suffix product code with: -392 (white), -315 (brown). Other finishes available depending on quantity.

More information

titoninc@titon.com / 574 271 9699

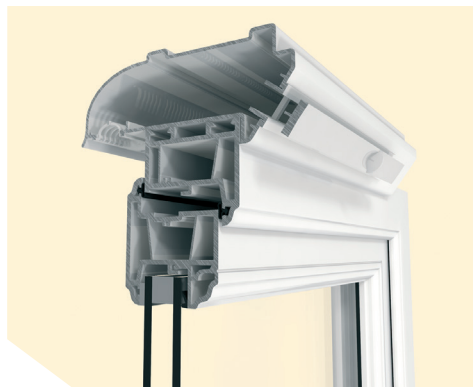

Overhead Section