

Trimvent® Select S13/XS13

Surface mounted vinyl slot ventilator



Trimvent® Select S13 Ventilator

Suitable for:



Trimvent Select S13 and XS13 are a surface mounted vinyl slot ventilators that fit over a ½” slot in a window and provide a much healthier indoor air environment in the home and give the home occupants greater comfort and control in doing so.

They feature a unique directional deflector that allows the occupant to position the airflow for optimum comfort and performance. The XS13 offers greater airflow capabilities.



Trimvent vents all give optimum airflow. Specifically developed to improve indoor air quality requirements throughout North America and the Rest of the World. Trimvent Select ventilators have been specified and fitted on millions of windows throughout the world for more than fifteen years.



Trimvent® Select C13 Canopy

Features and Benefits

- Unique occupant controllable tilting T-bar.
- Deflects air up or down, or both.
- For use over ½” slot.
- Choice of external C13 canopy or GS13 grill.
- Screw fix or clip fix versions (GS13 clip fix only).
- 3 ⅛ in² and 6 ¼ in² versions.
- Sculpted finger recess.
- Matching screw covers.
- Patented and registered design.
- Available in vent and canopy pre packs
- Cord control vent available (S13 only)
- Sleeve for hollow profiles available
- Suitable for aluminum, wood, vinyl and fiberglass windows

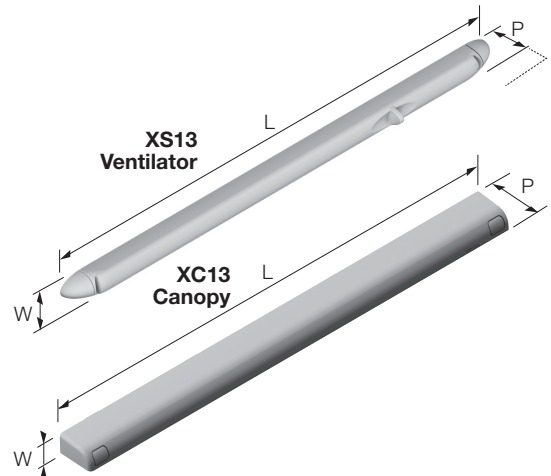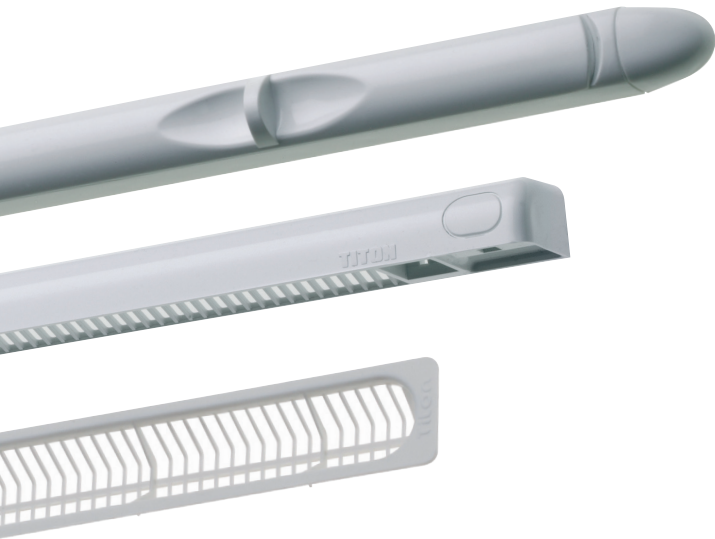

Product	Product Code	(L) Length	(W) Width	(P) Projection Closed-Open	Available Air Opening (Free Area)	Slot Size
Trimvent S13 Range – slot width up to ½”						
S13 2000 Internal Trickle Ventilator Screw Fix	TS1131750	10 7/16”	¾”	1 3/16” – 1”	3 7/16 in ²	
S13 2000 Cord Control Version of above	TS6131750	10 7/16”	¾”	*1 5/16”	3 7/16 in ²	
C13 2000 External Canopy Screw Fix	TS2132020	10 9/16”	1 1/16”	1 5/16”	3 5/8 in ²	8 25/32” ½”
S13 2000 Internal Trickle Ventilator Clip Fix	TS1131751	10 7/16”	¾”	1 3/16” – 1”	3 7/16 in ²	
C13 2000 External Canopy Clip Fix	TS2132021	10 9/16”	1 1/16”	1 5/16”	3 5/8 in ²	
S13 4000 Internal Trickle Ventilator Screw Fix	TS1132750	16 3/16”	¾”	1 3/16” – 1”	6 ¼ in ²	
S13 4000 Cord Control Version of above	TS6132750	16 3/16”	¾”	*1 5/16”	6 ¼ in ²	
C13 4000 External Canopy Screw Fix	TS2134020	16 3/16”	1 1/16”	1 5/16”	6 5/8 in ²	14 ½” ½”
S13 4000 Internal Trickle Ventilator Clip Fix	TS1132751	16 3/16”	¾”	1 3/16” – 1”	6 ¼ in ²	
C13 4000 External Canopy Clip Fix	TS2134021	16 3/16”	1 1/16”	1 5/16”	6 5/8 in ²	
GS13 4000 pair of Grills	TS3134050	7 9/16” each	1 1/16”	9/16”	3 ¼ in ² each	6 13/16” ½”

***Corner block and Pulley**


Product	Product Code	(L) Length	(W) Width	(P) Projection Closed-Open	Available Air Opening (Free Area)	Slot Size
Trimvent XS13 Range – slot width up to ½”						
XS13 412 Internal Trickle Ventilator Screw Fix	TS1134470	16 ¼”	¾” – 1 3/16”	1 3/16” – 1 1/16”	6 5/8 in ²	
XC13 412 External Canopy Screw Fix	TS2134040	16 ¼”	¾”	1 ¼”	7 13/16 in ²	14 ½” ½”
XS13 412 Internal Trickle Ventilator Clip Fix	TS1134071	16 ¼”	¾” – 1 3/16”	1 3/16” – 1 1/16”	6 3/8 in ²	
XC13 412 External Canopy Clip Fix	TS2134041	16 ¼”	¾”	1 ¼”	7 ½ in ²	
XS13 497 Internal Trickle Ventilator Screw Fix	TS1135070	19 9/16”	¾” – 1 3/16”	1 3/16” – 1 1/16”	8 ½ in ²	
XC13 497 External Canopy Screw Fix	TS2135040	19 9/16”	¾”	1 ¼”	9 ¾ in ²	17 ¾” ½”
XS13 497 Internal Trickle Ventilator Clip Fix	TS1135071	19 9/16”	¾” – 1 3/16”	1 3/16” – 1 1/16”	7 7/8 in ²	
XC13 497 External Canopy Clip Fix	TS2135041	19 9/16”	¾”	1 ¼”	9 3/8 in ²	
GS22 241 pair of Grills	TS3224050	9 ½” each	1 1/16”	1 ½”	15 ½ in ²	19 ¼” ½”

Manufactured from

VPBTP (UV Stable) & POM, Canopy – PVCu

Recommended screws

C13 No.6 Pan Head or equivalent.
S13 No.7 or No.8 Countersunk Heads

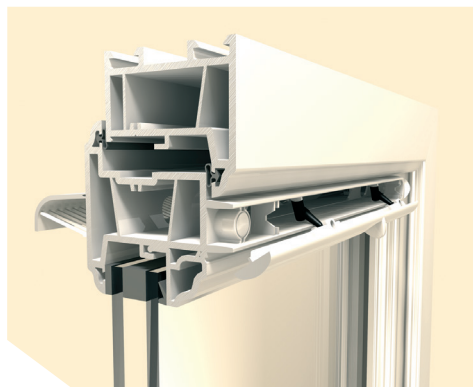

Through sash

Performance

(Further test information available on request).

Free Area – see above.

Water Resistance – in excess of 12.5 psf / 600Pa.

Acoustic STC – S13 4000 vent – open 33dB – closed 45dB

Acoustic STC – XS13 412 vent – open 32dB – closed 41dB

Acoustic STC – XS13 497 vent – open 32dB – closed 35dB

Finishes

Suffix product code with: -392 (white), -315 (brown), -496 (bright white), -662 (toffee).

More information

titoninc@titon.com / 574 271 9699