

Trimvent® Select Xtra XS16

Surface mounted vinyl slot ventilator



Trimvent® Select Xtra S16 Ventilator

Suitable for:

- VINYL
- ALUMINUM
- WOOD
- FIBERGLASS

Trimvent Select Xtra XS16 is a surface mounted vinyl slot ventilator that fits over a 5/8" slot in a window and provides a much healthier indoor air environment in the home and give the home occupants greater comfort and control in doing so.

It features a unique directional deflector that allows the occupant to position the airflow for optimum comfort and performance.


Trimvent vents all give optimum airflow. Specifically developed to improve indoor air quality requirements throughout North America and the Rest of the World. Trimvent Select ventilators have been specified and fitted on millions of windows throughout the world for more than fifteen years.




Trimvent® Select Xtra C16 Canopy

Features and Benefits

- Unique occupant controllable tilting T-bar
- Deflects air up or down, or both
- For use over 5/8" slot
- Use with external C16 Canopy (or a pair of GN, GW or PG16 grills)
- Up to 7 3/4 in² Free Area
- Sculpted finger recess
- Matching screw covers
- Patented and registered design
- Available in vent and canopy pre packs
- Sleeve for hollow profiles available
- Suitable for aluminum, wood, vinyl and fiberglass windows

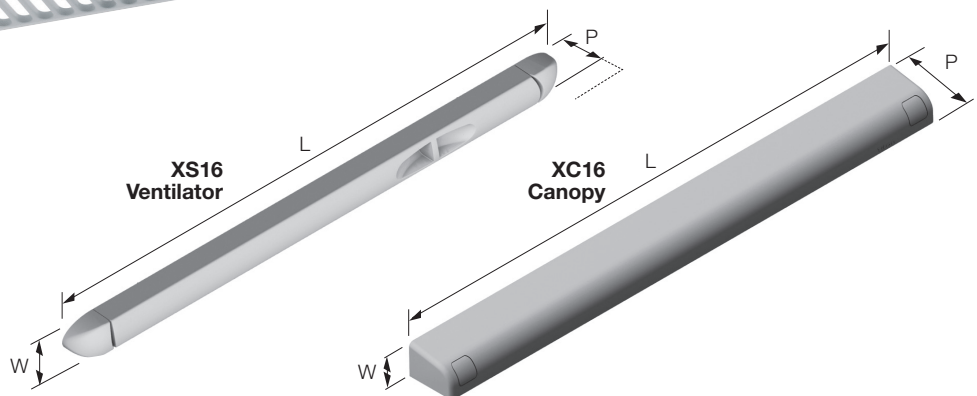

Product	Product Code	(L) Length	(W) Width	(P) Projection Closed-Open	Available Air Opening (Free Area)	Slot Size
Trimvent XS16 Range – slot width up to 5/8"						
XS16 366 Internal Trickle Ventilator Screw Fix	TS1164670	14 3/8"	1 3/16" – 1 1/4"	5/8" – 1 1/16"	7 in ²	12 1/4"  5/8"
XC16 364 External Canopy Screw Fix	TS2164040	14 5/16"	7/8"	1 1/4"	7 3/4 in ²	


Manufactured from

VPBTP (UV Stable) & POM, Canopy – PVCu

Recommended screws

C16 No.6 Pan Head or equivalent.

XS16 No.7 or No.8 Countersunk Heads.

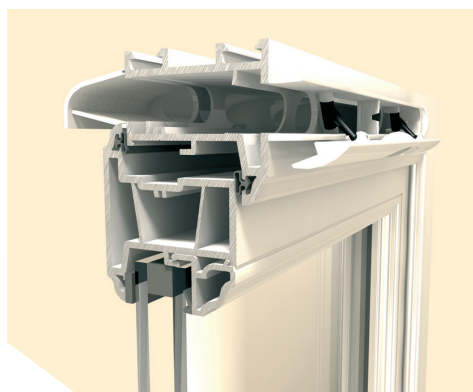

Through sash

Performance

(Further test information available on request).

Free Area – see above.

Water Resistance – in excess of 12.5 psf / 600Pa.

Acoustic STC – open 31dB – closed 41dB.

Finishes

Suffix product code with: -392 (white), -315 (brown), -496 (bright white), -662 (toffee).

More information

titoninc@titon.com / 574 271 9699